


Fork Style, 10 mm², single pole busbar, Blue / Gabelstil, 10 mm², einpolige Sammelschiene, Blau / Estilo de horquilla, 10 mm², barra colectora de un polo, Azul



IZ10/1F/N

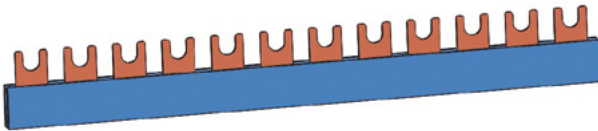

TECHNICAL DATA / TECHNISCHE DATEN / DATOS TÉCNICOS		
U_e	Nominal voltage / Bemessungsspannung / Tensión nominal de conexión	240 [V]
U_i	Rated insulation voltage / Bemessungsisolationsspannung / Tensión nominal de aislamiento	500 [V]
I_e	Max. current / max. Schienstrom / Capacidad de carga de corriente	63 [A]
U_{imp}	Surge voltage / Bemessungsschossspannung / Tensión nominal de choque tolerada	4 [kV]
	Material of insulation / Werkstoff für Isolierung / Material de aislamiento	PVC-U
	Material of conductor / elektrisches Leitermaterial / Material de conductor	Cu-ETP

Standard Variants (customable lengths) / Standardvarianten (anpassbare Längen) / Variantes estándar (longitudes personalizables)

TYPE TYP TIPO	CROSS-SECTION QUERSCHNITT SECCIÓN [mm ²]	MODULE DIMENSION MASS MODULE DIMENSIONES DEL MÓDULO [mm]	LENGTH* LÄNGE LONGITUD* [mm]	MODULES (LENGTH) MODULE (LÄNGE) MÓDULOS (LONGITUD)	CATALOGUE NUMBER KATALOGNUMMER NÚMERO DE CATÁLOGO	PACKAGING / VERPACKUNG / EMBALAJE	
						Single package / Packungsstück / Embalaje individual [pcs]/[kg]	Collective packaging / Sammelverpackung / Embalaje colectivo [pcs]/[kg]
IZ10/1F/2/N	10	17,8	465	26	0110012102	40/4,55	
IZ10/1F/6/N	10	17,8	215	12	0110012106	40/2,10	480/24,48
IZ10/1F/12/N	10	17,8	322	18	0110012112	40/3,15	
IZ10/1F/18/N	10	17,8	429	24	0110012118	40/4,20	
IZ10/1F/24/N	10	17,8	963	54	0110012124	40/9,45	
IZ10/1F/54/N	10	17,8	963	54	0110012154	40/9,45	
IZ10/1F/58/N	10	17,8	1034	58	0110012158	40/10,15	

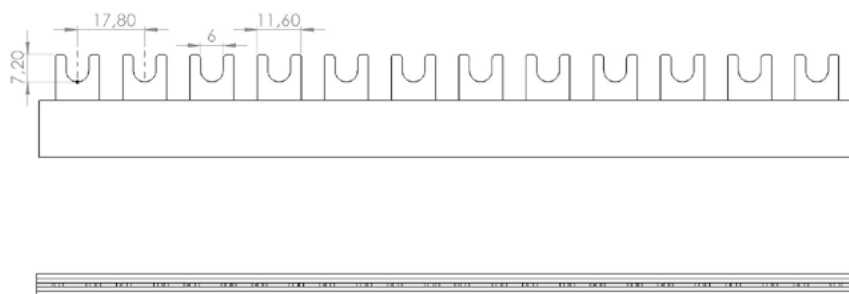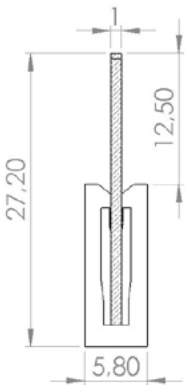

ACCESSORIES / ZUBERHÖR / ACCESORIOS

ENDCAP / ENDKAPPE / TAPÓN	TYPE TYP TIPO	CATALOGUE NUMBER KATALOGNUMMER NÚMERO DE CATÁLOGO	PACKAGING / VERPACKUNG / EMBALAJE	
			[pcs]/[kg]	[box]/[kg]
	Z-10/1F/N	21	/25/-/0,005/	/250/-/0,050/



Quality Control:



TÜV
Verified product
No: 000002385
www.cerifykat.tuv-nord.pl



IEC 60847-7-1:2009