


Fork Style, 10 mm², 2 poles busbar, Divided / Gabelstil, 10 mm², zweipolige Sammelschiene, geteilt /
Estilo de horquilla, 10 mm², barra colectora de dos polos, dividida



IZ10/2F/D



TECHNICAL DATA / TECHNISCHE DATEN / DATOS TÉCNICOS		
U_e	Nominal voltage / Bemessungsspannung / Tensión nominal de conexión	240/415 [V]
U_i	Rated insulation voltage / Bemessungsisolationsspannung / Tensión nominal de aislamiento	500 [V]
I_e	Max. current / max.Schienstrom / Capacidad de carga de corriente	63 [A]
U_{imp}	Surge voltage / Bemessungsschossspannung / Tensión nominal de choque tolerada	4 [kV]
	Material of insulation / Werkstoff für Isolierung / Material de aislamiento	PVC-U
	Material of conductor / elektrisches Leitermaterial / Material de conductor	Cu-ETP

Standard Variants (customable lengths) / Standardvarianten (anpassbare Längen) / Variantes estándar (longitudes personalizables)

TYPE TYP TIPO	CROSS-SECTION QUERSCHNITT SECCIÓN [mm ²]	MODULE DIMENSION MASS MODULE DIMENSIONES DEL MÓDULO [mm]	LENGTH* LÄNGE LONGITUD* [mm]	MODULES (LENGTH) MÓDULO (LÄNGE) MÓDULOS (LONGITUD)	CATALOGUE NUMBER KATALOGNUMMER NÚMERO DE CATÁLOGO	PACKAGING / VERPACKUNG / EMBALAJE	
						Single package / Packagingseinheit / Embalaje individual [pcs]/[kg]	Collective packaging / Sammelverpackung / Embalaje colectivo [pcs]/[kg]
IZ10/2F/4/D	10	18	74	4	0110020204	20/0,64	240/8,16
IZ10/2F/8/D	10	18	146	8	0110020208	20/1,28	240/16,32
IZ10/2F/12/D	10	18	218	12	0110020212	20/1,92	240/24,48
IZ10/2F/18/D	10	18	326	18	0110020218	20/2,88	
IZ10/2F/24/D	10	18	434	24	0110020224	20/3,84	
IZ10/2F/54/D	10	18	974	54	0110020254	20/9,07	
IZ10/2F/56/D	10	18	1010	56	0110020256	20/9,41	

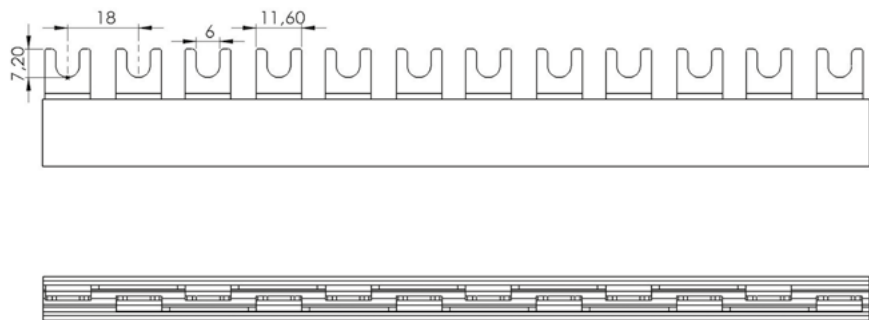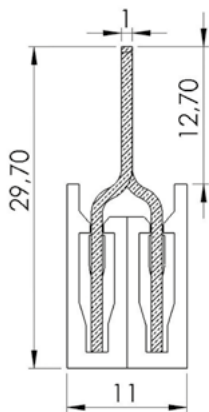

ACCESSORIES / ZUBERHÖR / ACCESORIOS

ENDCAP / ENDKAPPE / TAPÓN	TYPE TYP TIPO	CATALOGUE NUMBER KATALOGNUMMER NÚMERO DE CATÁLOGO	PACKAGING / VERPACKUNG / EMBALAJE	
			[pcs]/[kg]	[box]/[kg]
	Z-10/1F	03	/25/-0,005/	/250/-0,050/



Quality Control:



TÜV
Verified product
No: 0000082365
www.certykat.tuv-nord.pl

