

Fork Style, 16 mm², single pole busbar, enclosed / Gabelstil, 16 mm², einpolige Sammelschiene, geschlossen / Estilo de horquilla, 16 mm², barra colectora de un polo, cerrada



IZ16/1F/C



TECHNICAL DATA / TECHNISCHE DATEN / DATOS TÉCNICOS		
U_e	Nominal voltage / Bemessungsspannung / Tensión nominal de conexión	240 [V]
U_i	Rated insulation voltage / Bemessungsisolationsspannung / Tensión nominal de aislamiento	500 [V]
I_e	Max. current / max. Schienstrom / Capacidad de carga de corriente	100 [A]
U_{imp}	Surge voltage / Bemessungsschlagspannung / Tensión nominal de choque tolerada	4 [kV]
	Material of insulation / Werkstoff für Isolierung / Material de aislamiento	PC-ABS*
	Material of conductor / elektrisches Leitermaterial / Material de conductor	Cu-ETP

Standard Variants (customable lengths) / Standardvarianten (anpassbare Längen) / Variantes estándar (longitudes personalizables)

TYPE TYP TIPO	CROSS-SECTION QUERSCHNITT SECCIÓN	MODULE DIMENSION MASS MODULE DIMENSIONES DEL MÓDULO	LENGTH* LÄNGE LONGITUD*	MODULES (LENGTH) MÓDULO (LÄNGE) MÓDULOS (LONGITUD)	CATALOGUE NUMBER KATALOGNUMMER NÚMERO DE CATÁLOGO	PACKAGING / VERPACKUNG / EMBALAJE	
						Single package / Packungseinheit / Embalaje individual [pcs]/[kg]	Collective packaging / Sammelverpackung / Embalaje colectivo [pcs]/[kg]
IZ16/1F/12/C	16	17,8	216	12	0116011512	40/2,76	480/33,12

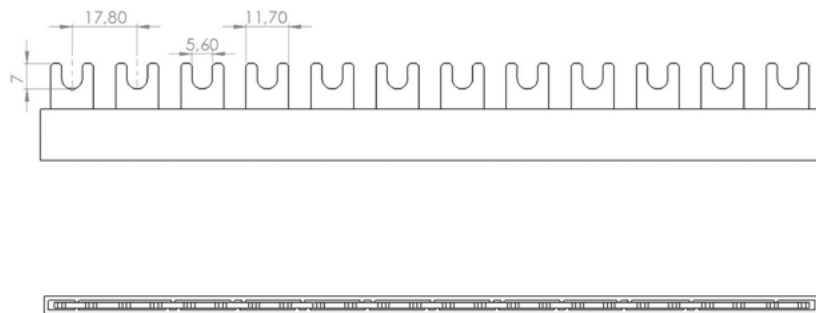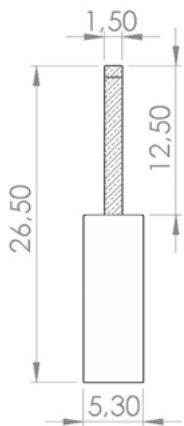

ACCESSORIES / ZUBERHÖR / ACCESORIOS

ENDCAP / ENDKAPPE / TAPÓN	TYPE TYP TIPO	CATALOGUE NUMBER KATALOGNUMMER NÚMERO DE CATÁLOGO	PACKAGING / VERPACKUNG / EMBALAJE
do not use / nicht verwenden / no usar	I-I	I-I	[pcs]/[kg] [box]/[kg]

Quality Control:



TÜV
Verified product
No: 000002385
www.cerifykat.tuv-nord.pl



IEC 60847-7-1:2009