


Fork Style, 16 mm², 2 poles busbar, Divided / Gabelstil, 16 mm², zweipolige Sammelschiene, geteilt /
Estilo de horquilla, 16 mm², barra colectora de dos polos, dividida



IZ16/2F/D



TECHNICAL DATA / TECHNISCHE DATEN / DATOS TÉCNICOS		
U_e	Nominal voltage / Bemessungsspannung / Tensión nominal de conexión	240/415 [V]
U_i	Rated insulation voltage / Bemessungsisolationsspannung / Tensión nominal de aislamiento	500 [V]
I_e	Max. current / max.Schienstrom / Capacidad de carga de corriente	100 [A]
U_{imp}	Surge voltage / Bemessungsstossspannung / Tensión nominal de choque tolerada	4 [kV]
	Material of insulation / Werkstoff für Isolierung / Material de aislamiento	PVC-U
	Material of conductor / elektrisches Leitermaterial / Material de conductor	Cu-ETP

Standard Variants (customable lengths) / Standardvarianten (anpassbare Längen) / Variantes estándar (longitudes personalizables)

TYPE TYP TIPO	CROSS-SECTION QUERSCHNITT SECCIÓN [mm ²]	MODULE DIMENSION MASS MODULE DIMENSIONES DEL MÓDULO [mm]	LENGTH* LÄNGE LONGITUD* [mm]	MODULES (LENGTH) MODULE (LÄNGE) MÓDULOS (LONGITUD)	CATALOGUE NUMBER KATALOGNUMMER NÚMERO DE CATÁLOGO	PACKAGING / VERPACKUNG / EMBALAJE	
						Single package / Packungseinheit / Embalaje individual [pcs]/[kg]	Collective packaging / Sammelverpackung / Embalaje colectivo [pcs]/[kg]
IZ16/2F/9/D	16	18	164	9	0116020209	20/2,03	240
IZ16/2F/12/D	16	18	218	12	0116020212	20/2,70	240
IZ16/2F/18/D	16	18	326	18	0116020218	20/4,05	240
IZ16/2F/24/D	16	18	434	24	0116020224	20/5,40	
IZ16/2F/54/D	16	18	974	54	0116020254	20/12,47	
IZ16/2F/56/D	16	18	1010	56	0116020256	20/12,94	

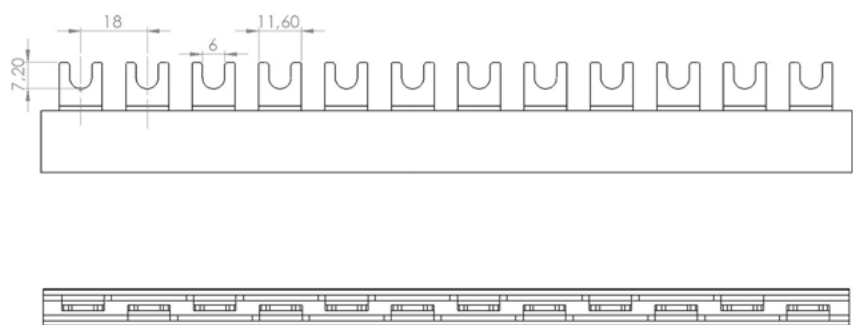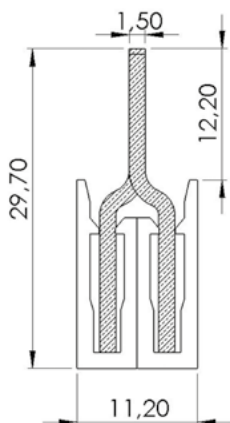

ACCESSORIES / ZUBERHÖR / ACCESORIOS

ENDCAP / ENDKAPPE / TAPÓN	TYPE TYP TIPO	CATALOGUE NUMBER KATALOGNUMMER NÚMERO DE CATÁLOGO	PACKAGING / VERPACKUNG / EMBALAJE
	Z-16/1F	03	[pcs]/[kg] [box]/[kg] /25/-0,005/ /250/-0,050/



Quality Control:



TÜV
Verified product
No: 0000082385
www.certhkat.tuv-nord.pl



IEC 60947-7-1:2009