

Fork Style, 16 mm², 4 poles busbar / Gabelstil, 16 mm², vierpolige Sammelschiene /
Estilo de horquilla, 16 mm², barra colectora de cuatro polos

IZ16/4F





TECHNICAL DATA / TECHNISCHE DATEN / DATOS TÉCNICOS

U_e	Nominal voltage / Bemessungsspannung / Tensión nominal de conexión	240/415 [V]
U_i	Rated insulation voltage / Bemessungsisolationsspannung / Tensión nominal de aislamiento	500 [V]
I_e	Max. current / max. Schienstrom / Capacidad de carga de corriente	100 [A]
U_{imp}	Surge voltage / Bemessungsstossspannung / Tensión nominal de choque tolerada	4 [kV]
	Material of insulation / Werkstoff für Isolierung / Material de aislamiento	PVC-U
	Material of conductor / elektrisches Leitermaterial / Material de conductor	Cu-ETP

Standard Variants (customable lengths) / Standardvarianten (anpassbare Längen) / Variantes estándar (longitudes personalizables)

TYPE TYP TIPO	CROSS-SECTION QUERSCHNITT SECCIÓN [mm ²]	MODULE DIMENSION MASS MODULE DIMENSIONES DEL MÓDULO [mm]	LENGTH* LÄNGE LONGITUD* [mm]	MODULES (LENGTH) MODULE (LÄNGE) MÓDULOS (LONGITUD)	CATALOGUE NUMBER KATALOGNUMMER NÚMERO DE CATÁLOGO	PACKAGING / VERPACKUNG / EMBALAJE	
						Single package / Packungsstück / Embalaje individual [pcs]/[kg]	Collective packaging / Sammelverpackung / Embalaje colectivo [pcs]/[kg]
IZ16/4F/ 8	16	18	146	8	0116040108	10/1,14	180/20,59
IZ16/4F/10	16	18	182	10	0116040110	10/1,43	180/30,88
IZ16/4F/12	16	18	218	12	0116040112	10/1,72	
IZ16/4F/16	16	18	290	16	0116040116	10/2,29	
IZ16/4F/18	16	18	326	18	0116040118	10/2,57	
IZ16/4F/24	16	18	434	24	0116040124	10/3,43	
IZ16/4F/56	16	18	1010	56	0116040156	10/9,24	

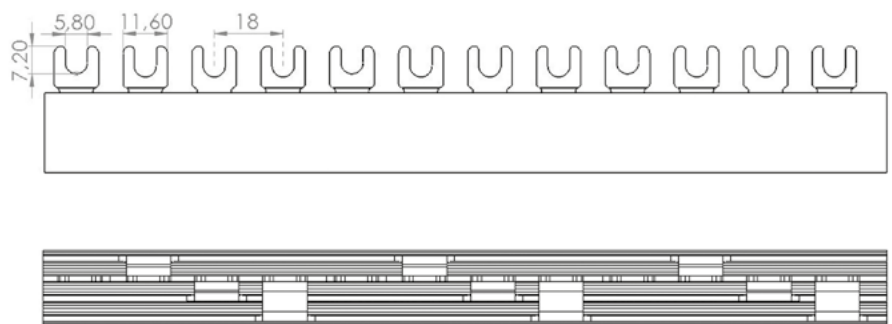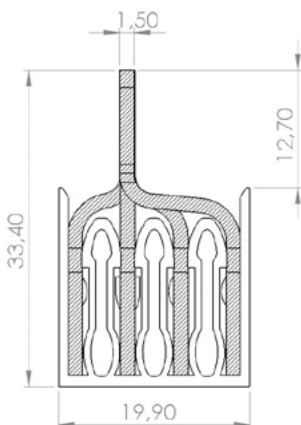

ACCESSORIES / ZUBERHÖR / ACCESORIOS

ENDCAP / ENDKAPPE / TAPÓN	TYPE TYP TIPO	CATALOGUE NUMBER KATALOGNUMMER NÚMERO DE CATÁLOGO	PACKAGING / VERPACKUNG / EMBALAJE	
			[pcs]/[kg]	[box]/[kg]
	Z-16/4F	12	125/-0,027	1250/-0,27



Quality Control:



TÜV
Verified product
No: 000002385
www.cerifykat.tuv-nord.pl



IEC 60847-7-7-1:2009