


Pin style, 10 mm², single pole busbar for solar / Stiftstil, 10 mm², einpolige Sammelschiene für Solar /
Estilo de pin, 10 mm², barra colectora de un polo para solar



IZS10/1F/1500V



TECHNICAL DATA / TECHNISCHE DATEN / DATOS TÉCNICOS		
U_e	Nominal voltage / Bemessungsspannung / Tensión nominal de conexión	240 [V]
U_i	Rated insulation voltage / Bemessungsisolationsspannung / Tensión nominal de aislamiento	1500 [V]
I_e	Max. current / max.Schienstrom / Capacidad de carga de corriente	63 [A]
U_{imp}	Surge voltage / Bemessungsstossspannung / Tensión nominal de choque tolerada	4 [kV]
	Material of insulation / Werkstoff für Isolierung / Material de aislamiento	PVC-U
	Material of conductor / elektrisches Leitermaterial / Material de conductor	Cu-ETP

Standard Variants (customable lengths) / Standardvarianten (anpassbare Längen) / Variantes estándar (longitudes personalizables)

TYPE TYP TIPO	CROSS-SECTION QUERSCHNITT SECCIÓN	MODULE DIMENSION MASS MODULE DIMENSIONES DEL MÓDULO	LENGTH* LÄNGE LONGITUD*	MODULES (LENGTH) MODULE (LÄNGE) MÓDULOS (LONGITUD)	CATALOGUE NUMBER KATALOGNUMMER NÚMERO DE CATÁLOGO	PACKAGING / VERPACKUNG / EMBALAJE	
						Single package / Packungsanzahl / Embalaje individual [pcs]/[kg]	Collective packaging / Sammelverpackung / Embalaje colectivo [pcs]/[kg]
IZS10/1F/4/1500V	10	17,8	73	4	0210012504	40/0,58	480/7,00
IZS10/1F/8/1500V	10	17,8	144	8	0210012508	40/1,17	480/14,02
IZS10/1F/12/1500V	10	17,8	216	12	0210012512	40/1,75	480/21,02
IZS10/1F/18/1500V	10	17,8	322	18	0210012518	40/2,63	
IZS10/1F/54/1500V	10	17,8	963	54	0210012554	40/7,88	
IZS10/1F/57/1500V	10	17,8	1017	57	0210012557	40/8,32	

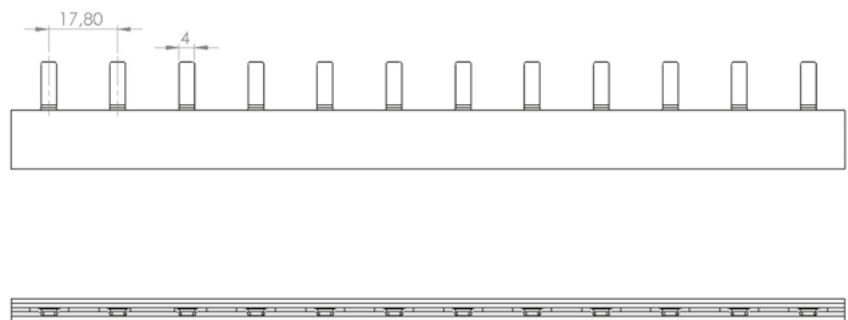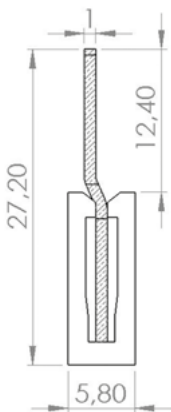

ACCESSORIES / ZUBERHÖR / ACCESORIOS

ENDCAP / ENDKAPPE / TAPÓN	TYPE TYP TIPO	CATALOGUE NUMBER KATALOGNUMMER NÚMERO DE CATÁLOGO	PACKAGING / VERPACKUNG / EMBALAJE	
			[pcs]/[kg]	[box]/[kg]
	ZS-10/1F	03	125/-0,005/	1250/-0,050/



Quality Control:



TÜV
Verified product
No: 000008385
www.certhkat.tuv-nord.pl



IEC 60947-7-7:1-2009