

Pin style, 16 mm², single pole busbar, 27 mm mod. / Stiftstil, 16 mm², einpolige Sammelschiene, 27mm mod. / Estilo de pin, 16 mm², barra colectora de un polo, 27 mm mod.



IZS16/1F/V



TECHNICAL DATA / TECHNISCHE DATEN / DATOS TÉCNICOS		
U_e	Nominal voltage / Bemessungsspannung / Tensión nominal de conexión	240 [V]
U_i	Rated insulation voltage / Bemessungsisolationsspannung / Tensión nominal de aislamiento	500 [V]
I_e	Max. current / max.Schienstrom / Capacidad de carga de corriente	100 [A]
U_{imp}	Surge voltage / Bemessungsstosspannung / Tensión nominal de choque tolerada	4 [kV]
	Material of insulation / Werkstoff für Isolierung / Material de aislamiento	PVC-U
	Material of conductor / elektrisches Leitermaterial / Material de conductor	Cu-ETP

Standard Variants (customable lengths) / Standardvarianten (anpassbare Längen) / Variantes estándar (longitudes personalizables)

TYPE TYP TIPO	CROSS-SECTION QUERSCHNITT SECCIÓN [mm ²]	MODULE DIMENSION MASS MODULE DIMENSIONES DEL MÓDULO [mm]	LENGTH* LÄNGE LONGITUD* [mm]	MODULES (LENGTH) MÓDULO (LÄNGE) MÓDULOS (LONGITUD)	CATALOGUE NUMBER KATALOGNUMMER NÚMERO DE CATÁLOGO	PACKAGING / VERPACKUNG / EMBALAJE	
						Single package / Packungsanzahl / Embalaje individual [pcs]/[kg]	Collective packaging / Sammelverpackung / Embalaje colectivo [pcs]/[kg]
IZS16/1F/ 6/V	16	17,8	109	6	0216010706	40/0,85	480/10,20
IZS16/1F/ 9/V	16	17,8	162	9	0216010709	40/1,28	480/15,30
IZS16/1F/12/V	16	17,8	216	12	0216010712	40/1,70	480/20,42
IZS16/1F/ 21/V	16	17,8	376	21	0216010721	40/6,80	
IZS16/1F/36/V	16	17,8	643	36	0216010736	40/2,27	

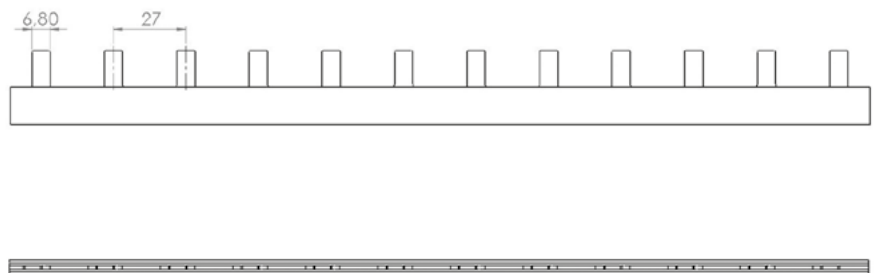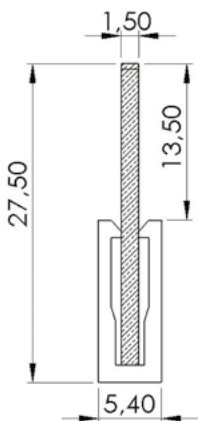

ACCESSORIES / ZUBERHÖR / ACCESORIOS

ENDCAP / ENDKAPPE / TAPÓN	TYPE TYP TIPO	CATALOGUE NUMBER KATALOGNUMMER NÚMERO DE CATÁLOGO	PACKAGING / VERPACKUNG / EMBALAJE
	ZS-16/1F	03	[pcs]/[kg] [box]/[kg] /25/-/0,005/ /250/-/0,050/



Quality Control:



TÜV
Verified product
No: 000008305
www.certhkat.tuv-nord.pl

