

**Fork Style, 16 mm<sup>2</sup>, 3 poles busbar, Divided / Gabelstil, 16 mm<sup>2</sup>, dreipolige Sammelschiene, geteilt /  
Estilo de horquilla, 16 mm<sup>2</sup>, barra colectora de tres polos, dividida**



**IZ16/3F/D**



TECHNICAL DATA / TECHNISCHE DATEN / DATOS TÉCNICOS		
<b>U<sub>e</sub></b>	Nominal voltage / Bemessungsspannung / Tensión nominal de conexión	240/415 [V]
<b>U<sub>i</sub></b>	Rated insulation voltage / Bemessungsisolationsspannung / Tensión nominal de aislamiento	500 [V]
<b>I<sub>e</sub></b>	Max. current / max. Schienstrom / Capacidad de carga de corriente	100 [A]
<b>U<sub>imp</sub></b>	Surge voltage / Bemessungsschossspannung / Tensión nominal de choque tolerada	4 [kV]
	Material of insulation / Werkstoff für Isolierung / Material de aislamiento	PVC-U
	Material of conductor / elektrisches Leitermaterial / Material de conductor	Cu-ETP

**Standard Variants (customable lengths) / Standardvarianten (anpassbare Längen) / Variantes estándar (longitudes personalizables)**

TYPE TYP TIPO	CROSS-SECTION QUERSCHNITT SECCIÓN [mm <sup>2</sup> ]	MODULE DIMENSION MASS MODULE DIMENSIONES DEL MÓDULO [mm]	LENGTH* LÄNGE LONGITUD* [mm]	MODULES (LENGTH) MÓDULO (LÄNGE) MÓDULOS (LONGITUD)	CATALOGUE NUMBER KATALOGNUMMER NÚMERO DE CATÁLOGO	PACKAGING / VERPACKUNG / EMBALAJE	
						Single package / Packungsseinheit / Embalaje individual [pcs]/[kg]	Collective packaging / Sammelverpackung / Embalaje colectivo [pcs]/[kg]
IZ16/3F/ 9/D	16	17,8	162	9	0116030209	20/2,26	180/20,33
IZ16/3F/12/D	16	17,8	216	12	0116030212	20/3,01	180/27,12
IZ16/3F/18/D	16	17,8	322	18	0116030218	20/4,52	
IZ16/3F/24/D	16	17,8	429	24	0116030224	20/6,02	
IZ16/3F/54/D	16	17,8	963	54	0116030254	20/14,36	

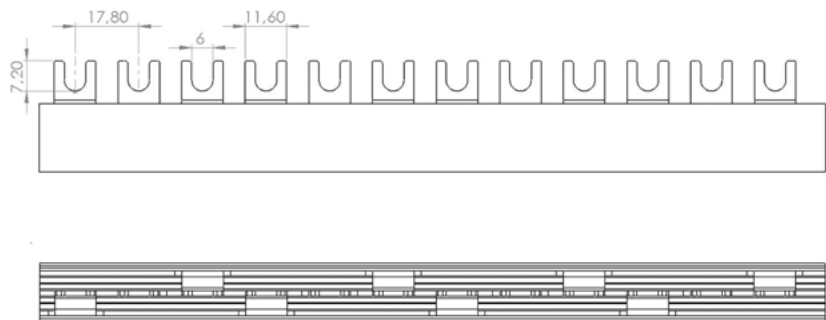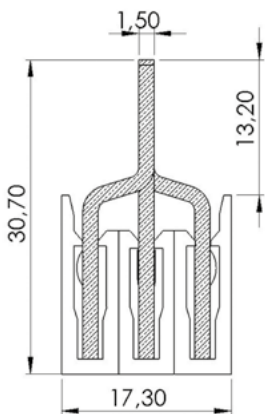

**ACCESSORIES / ZUBERHÖR / ACCESORIOS**

ENDCAP / ENDKAPPE / TAPÓN	TYPE TYP TIPO	CATALOGUE NUMBER KATALOGNUMMER NÚMERO DE CATÁLOGO	PACKAGING / VERPACKUNG / EMBALAJE	
			[pcs]/[kg]	[box]/[kg]
	Z-16/1F	03	/25/-/0,005/	/250/-/0,050/



Quality Control:



**TÜV**  
Verified product  
No: 000002385  
www.cerifykat.tuv-nord.pl



IEC 60847-7-7-1:2009