

Pin style, 10 mm², 2 poles busbar, 1 + Neutral / Stiftstil, 10 mm², zweipolige Sammelschiene, 1 + Neutral / Estilo de pin, 10 mm², barra colectora de dos polos, 1 + Neutro



SR2-10



TECHNICAL DATA / TECHNISCHE DATEN / DATOS TÉCNICOS		
U_e	Nominal voltage / Bemessungsspannung / Tensión nominal de conexión	240 [V]
U_i	Rated insulation voltage / Bemessungsisolationsspannung / Tensión nominal de aislamiento	500 [V]
I_e	Max. current / max. Schienstrom / Capacidad de carga de corriente	100 [A]
U_{imp}	Surge voltage / Bemessungsschossspannung / Tensión nominal de choque tolerada	4 [kV]
	Material of insulation / Werkstoff für Isolierung / Material de aislamiento	PVC-U
	Material of conductor / elektrisches Leitermaterial / Material de conductor	Cu-ETP

Standard Variants (customable lengths) / Standardvarianten (anpassbare Längen) / Variantes estándar (longitudes personalizables)

TYPE TYP TIPO	CROSS-SECTION QUERSCHNITT SECCIÓN [mm ²]	MODULE DIMENSION MASS MODULE DIMENSIONES DEL MÓDULO [mm]	LENGTH* LÄNGE LONGITUD* [mm]	MODULES (LENGTH) MÓDULOS (LONGITUD)	CATALOGUE NUMBER KATALOGNUMMER NÚMERO DE CATÁLOGO	PACKAGING / VERPACKUNG / EMBALAJE	
						Single package / Packungsstück / Embalaje individual [pcs]/[kg]	Collective packaging / Sammelverpackung / Embalaje colectivo [pcs]/[kg]
SR2-10/6/12	10	8,9	2	12	0210021606	20/0,75	180/6,75
SR2-10/12/24	10	8,9	216	24	0210021612	20/1,50	
SR2-10/24/48	10	8,9	429	48	0210021648	20/3,00	
SR2-10/54/108	10	8,9	963	108	0210021654	20/6,75	

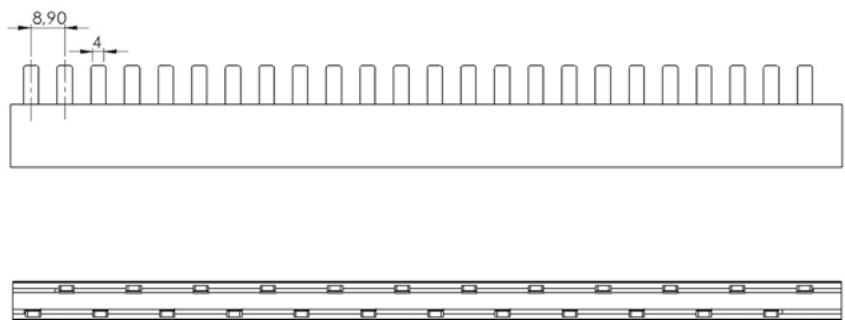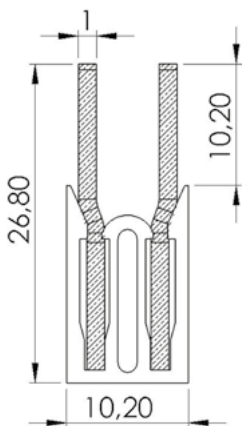

ACCESSORIES / ZUBERHÖR / ACCESORIOS

ENDCAP / ENDKAPPE / TAPÓN	TYPE TYP TIPO	CATALOGUE NUMBER KATALOGNUMMER NÚMERO DE CATÁLOGO	PACKAGING / VERPACKUNG / EMBALAJE	
	Z-10/2F	07	[pcs]/[kg]	[box]/[kg]
			125/-0,025/	1250/-0,0250/



Quality Control:



TÜV
Verified product
No: 000002385
www.cerifykat.tuv-nord.pl



IEC 60847-7-7-1:2009