

Fork Style, 10 mm<sup>2</sup>, 3 poles busbar, enclosed / Gabelstil, 10 mm<sup>2</sup>, dreipolige Sammelschiene, geschlossen / Estilo de horquilla, 10 mm<sup>2</sup>, barra colectora de tres polos, cerrada



**IZ10/3F/C**



TECHNICAL DATA / TECHNISCHE DATEN / DATOS TÉCNICOS		
<b>U<sub>e</sub></b>	Nominal voltage / Bemessungsspannung / Tensión nominal de conexión	240/415 [V]
<b>U<sub>i</sub></b>	Rated insulation voltage / Bemessungsisolationsspannung / Tensión nominal de aislamiento	500 [V]
<b>I<sub>e</sub></b>	Max. current / max.Schienstrom / Capacidad de carga de corriente	63 [A]
<b>U<sub>imp</sub></b>	Surge voltage / Bemessungsstosspannung / Tensión nominal de choque tolerada	4 [kV]
	Material of insulation / Werkstoff für Isolierung / Material de aislamiento	PC-ABS*
	Material of conductor / elektrisches Leitermaterial / Material de conductor	Cu-ETP

Standard Variants (customable lengths) / Standardvarianten (anpassbare Längen) / Variantes estándar (longitudes personalizables)

TYPE TYP TIPO	CROSS-SECTION QUERSCHNITT SECCIÓN [mm <sup>2</sup> ]	MODULE DIMENSION MASS MODULE DIMENSIONES DEL MÓDULO [mm]	LENGTH* LÄNGE LONGITUD* [mm]	MODULES (LENGTH) MODULE (LÄNGE) MÓDULOS (LONGITUD)	CATALOGUE NUMBER KATALOGNUMMER NÚMERO DE CATÁLOGO	PACKAGING / VERPACKUNG / EMBALAJE	
						Single package / Packungsanzahl / Embalaje individual [pcs]/[kg]	Collective packaging / Sammelverpackung / Embalaje colectivo [pcs]/[kg]
IZ10/3F/ 6/C	10	17,8	109	6	0110031506	20/1,10	240/13,24
IZ10/3F/ 9/C	10	17,8	162	9	0110031509	20/1,66	240/19,97
IZ10/3F/12/C	10	17,8	216	12	0110031512	20/2,21	240/26,49
IZ10/3F/18/C	10	17,8	322	18	0110031518	20/3,31	

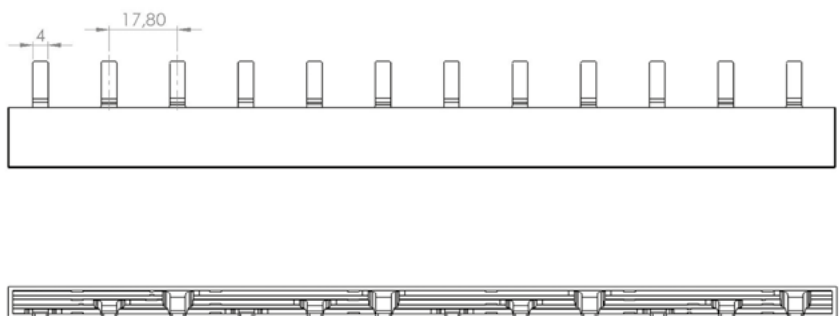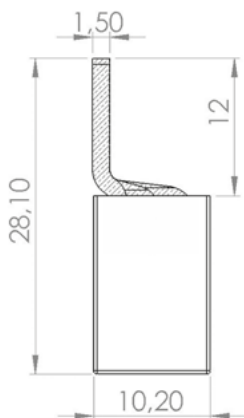

ACCESSORIES / ZUBERHÖR / ACCESORIOS

ENDCAP / ENDKAPPE / TAPÓN	TYPE TYP TIPO	CATALOGUE NUMER KATALOGNUMMER NÚMERO DE CATÁLOGO	PACKAGING / VERPACKUNG / EMBALAJE
do not use / nicht verwenden / no usar	I-I	I-I	[pcs]/[kg] [box]/[kg]

Quality Control:



**TÜV**  
Verified product  
No: 0000082365  
www.certhkat.tuv-nord.pl

