

Fork Style, 16 mm², 4 poles busbar, Added Neutral / Gabelstil, 16 mm², vierpolige Sammelschiene, mit Neutral / Estilo de horquilla, 16 mm², barra colectora de cuatro polos, con neutro añadido



IZ16/L1NL2NL3N



TECHNICAL DATA / TECHNISCHE DATEN / DATOS TÉCNICOS	
U_e	Nominal voltage / Bemessungsspannung / Tensión nominal de conexión 240/415 [V]
U_i	Rated insulation voltage / Bemessungsisolationsspannung / Tensión nominal de aislamiento 690 [V]
I_e	Max. current / max.Schienstrom / Capacidad de carga de corriente 100 [A]
U_{imp}	Surge voltage / Bemessungsstossspannung / Tensión nominal de choque tolerada 6 [kV]
	Material of insulation / Werkstoff für Isolierung / Material de aislamiento PVC
	Material of conductor / elektrisches Leitermaterial / Material de conductor Cu-ETP


Standard Variants (customable lengths) / Standardvarianten (anpassbare Längen) / Variantes estándar (longitudes personalizables)

TYPE TYP TIPO	CROSS-SECTION QUERSCHNITT SECCIÓN [mm ²]	MODULE DIMENSION MASS MODULE DIMENSIONES DEL MÓDULO [mm]	LENGTH* LÄNGE LONGITUD* [mm]	MODULES (LENGTH) MÓDULO (LÄNGE) MÓDULOS (LONGITUD)	CATALOGUE NUMBER KATALOGNUMMER NÚMERO DE CATÁLOGO	PACKAGING / VERPACKUNG / EMBALAJE	
						Single package / Packungseinheit / Embalaje individual [pcs]/[kg]	Collective packaging / Sammelverpackung / Embalaje colectivo [pcs]/[kg]
IZ16/L1NL2NL3N/8	16	18	146	8	0116042008	10/1,35	180/24,34
IZ16/L1NL2NL3N/12	16	18	218	12	0116042012	10/2,03	180/36,50
IZ16/L1NL2NL3N/16	16	18	290	16	0116042016	10/2,70	
IZ16/L1NL2NL3N/18	16	18	326	18	0116042018	10/3,04	
IZ16/L1NL2NL3N/24	16	18	434	24	0116042024	10/4,06	
IZ16/L1NL2NL3N/54	16	18	974	54	0116042054	10/9,13	

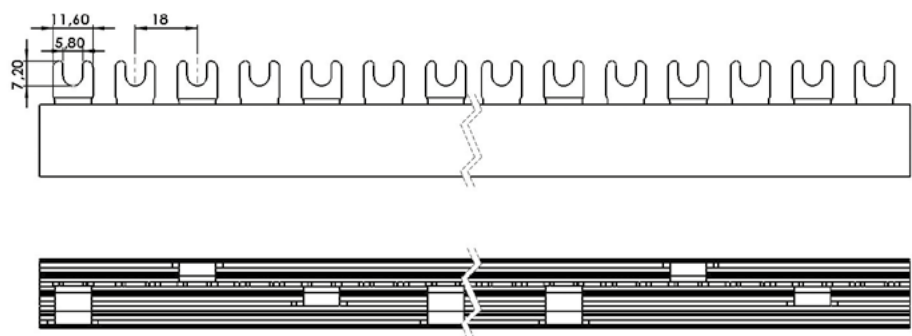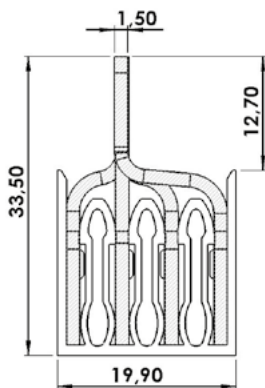

ACCESSORIES / ZUBERHÖR / ACCESORIOS

ENDCAP / ENDKAPPE / TAPÓN	TYPE TYP TIPO	CATALOGUE NUMBER KATALOGNUMMER NÚMERO DE CATÁLOGO	PACKAGING / VERPACKUNG / EMBALAJE
	Z-16/4F	12	[pcs]/[kg] [box]/[kg] /25/-0,005/ /250/-0,625/



Quality Control:



TÜV
Verified product
No. 0000082365
www.certhkat.tuv-nord.pl

